



ACOS5-EVO



Outline

- 1. Product Information
 - Product Overview
 - Product Features
 - Technical Specifications
 - Certifications/Compliance
- 2. Product Applications
- 3. Related Software Products





Product Information



Product Overview

ACOS5-EVO Series



PN: ACOS5-K1A ACOS5-EVO (Contact)



PN: ACOS5-K1K ACOS5-EVO (Combi)



PN: ACOS5-K1L ACOS5-EVO (Contactless)



PN: ACOS5T2-B1E1 CryptoMate EVO



Key Features of ACOS5-EVO

Cryptographic Algorithms

- ECC: Curves P-224/P-256/P-384/P-521
- RSA: up to 4096 bits
- AES: 128/192/256-bits (ECB, CBC)
- DES/3DES: 56/112/168-bits (ECB, CBC)
- Hash: SHA1, SHA224, SHA256, SHA384, SHA512
- MAC: CBC-MAC (DES/3DES, AES), CMAC (3DES, AES)
- Random Number Generator

Speed and Memory

- 192 KB Memory
- Configurable ATR (Answer To Reset)
- Anti-tearing Function

Certifications and Compliance

- Common Criteria EAL5+ (Chip Level)
- ISO 7816 Parts 1, 2, 3, 4, 8, and 9
- ISO 14443 Parts 1-4, Type A
- FIPS 140-2 Level 3 Compliant

Security Functions

- Provides multi-level secured access hierarchy
- Supports Secure Messaging
- Supports Mutual Authentication and Session Key Generation



Technical Specifications

Category		ACOS5-EVO	
Product Code		ACOS5-K1AACSA4200 (Contact) ACOS5-K1KACSA4200 (Combi) ACOS5-K1LACSA4200 (Contactless)	
User EEPROM Memory			
User Memory		192 KB	
Endurance (write/erase cycle)		500,000	
Compliance to ISO Standards			
Contact	ISO 7816 – 1/2/3/4	\checkmark	
	ISO 7816 – 4	\checkmark	
	ISO 7816 – 8/9	\checkmark	
Contactless	ISO 14443 - 1/2/3/4	\checkmark	
	Туре А	\checkmark	



Technical Specifications

Category		ACOS5-EVO	
Communication Speed and Protocol: Contact Interface			
Protocol	T=0	\checkmark	
	T=1	✓ (Default)	
Speed	9,600 bps – 446,400 bps	✓ TA = 96 (223,200 bps) Default	
Communication Speed and Protocol: Contactless Interface			
Protocol	T=CL	\checkmark	
Speed	106,000 – 424,000 kbps	\checkmark	
Operating Conditions			
Temperature		0 °C – 50 °C	
Humidity		Max. 90% (non-condensing)	



Technical Specifications

Category	ACOS5-EVO	
Cryptographic Capabilities		
ECC	P-224/P-256/P-384/P-521	
RSA	up to 4096 bits	
DES/3DES	56/112/168-bits (ECB, CBC)	
AES	128/192/256 bits (ECB, CBC)	
Hash	SHA1, SHA224, SHA256, SHA384, SHA512	
MAC	CBC-MAC (DES/3DES, AES), CMAC (3DES, AES)	
Secure Messaging	\checkmark	
Mutual Authentication	\checkmark	





Product Applications




In what areas can we apply ACOS5-EVO?



In what areas can ACOS5-EVO be used?

Company provides their employees with an ID








Employee inserts the ACOS5-EVO in the ACR39U PocketMate









Employees stores the digital certificate in the ID



Administrator checks the credentials and provides the employee with the link to download and store the certificate in the ID



In what areas can ACOS5-EVO be used?

Citizens go to Registration Authorities to apply for a Digital Certificate



Certificate Authority provides the citizen with the digital certificate



Citizen logs in to a secured website and submits the digitally signed and encrypted document to the government agency





Citizen digitally signs and encrypts his Income Tax Statement using the digital certificate stored in the card









Related Software Products



ACS offers the **ACOS5-EVO PKI KIT** to Certificate Authorities and other organizations who are interested in deploying **PKI Solutions with ECC Support.**

With the ACOS5-EVO/CryptoMate EVO PKI Kit, the following are supported:

- Secure Online Certificate Generation
- Microsoft® Outlook and Mozilla® Thunderbird® mail signing and encryption (S/MIME)
- Windows® Smart Card Logon
- Microsoft® Office
- Adobe® Reader®

Contact your ACS sales representative, visit our website at <u>http://www.acs.com.hk</u> or email us at <u>info@acs.com.hk</u> for more information.



ACOS5 Minidriver

For clients who want to use the ACOS5-EVO and CryptoMate EVO in Windows Environment only, ACS also provides the ACOS5 Minidriver.


The following Windows applications are supported:

- Windows® Smart Card Logon
- Microsoft® Office
- Microsoft[®] Outlook mail signing and encryption (S/MIME)

Once the token has been initialized with the ACOS5 Minidriver, it can only be used with Windows OS and will not be compatible with other ACS middleware.

Contact your ACS sales representative, visit our website at <u>http://www.acs.com.hk</u> or email us at <u>info@acs.com.hk</u> for more information.



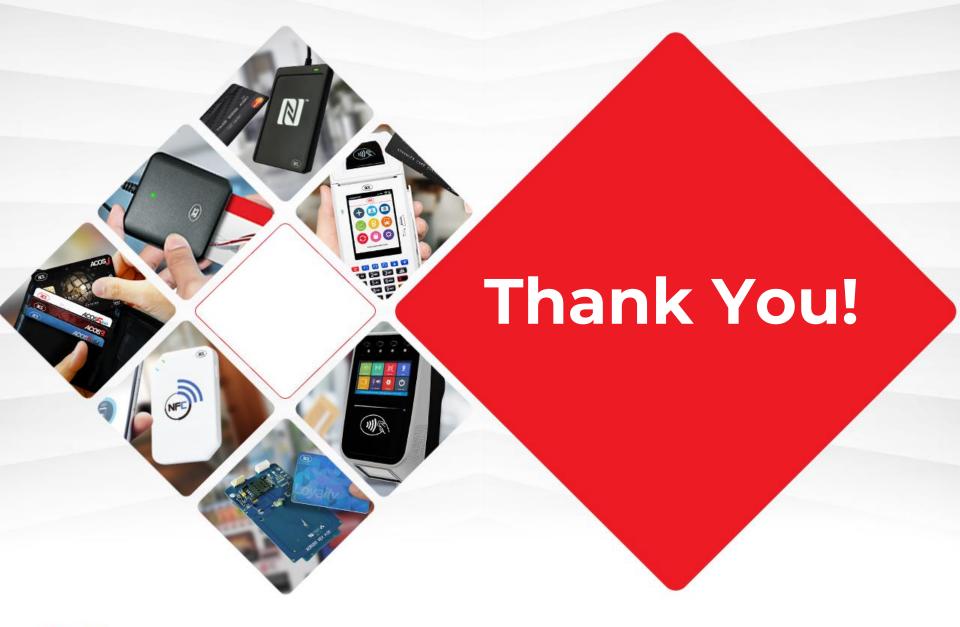



info@acs.com.hk www.acs.com.hk